







35 AH BATTERY

- Sealed Lead Acid
- 12 Volt
- Deep Cycle
- VRLA
- AGM
- 35AH/20 Hour
- Group 27
- Rechargeable

Electrical Specifications	35AH	
Capacity 77°F 25°C	20 hour rate (1.75A)	35AH
	10 hour rate (3.4A)	32.5 AH
	5 hour rate (5.78A)	29.7 AH
	1 hour rate (20.4A)	19.9 AH
Internal Resistance	Fully charged battery 77°F	13m Ω
Capacity	104°F	102%
Affected By	77°F	100%
Temperature	32°F	85%
(20 hour rate)	5°F	65%
Self-Discharge 77°F 25°C	Capacity after 3 month storage	92%
	Capacity after 6 month storage	83%
	Capacity after 12 month storage	65%
Charge Constant Voltage	Cycle: initial charging current less than 27.0A Voltage 14.4-15.0 V 77°F Standby Voltage 13.5-13.8 V 77°F	



Discharge Characteristics(20°C, 68°F)

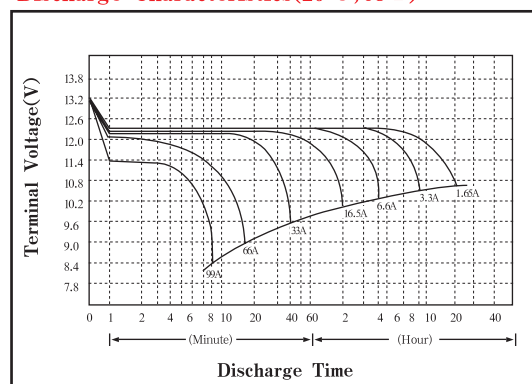

Discharge Characteristics(0°C/32°F, 40°C/104°F)

